
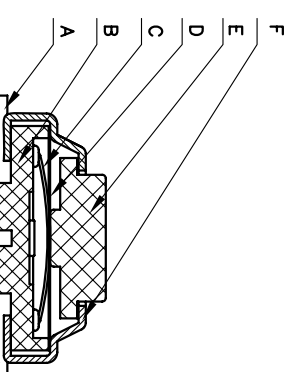



规格 Specifications		
额定负荷 Rating	DC 12V/500mA	
接触电阻 Contact Resistance	100mΩ max.	
绝缘电阻 Insulation resistance	DC100V 60S 100MΩ min.	
抗电强度 Dielectric strength	AC250V(50~60Hz) 60S min.	
操作力 Operation force	160±30gf	250±50gf
寿命试验 Operating Life	100,000 cycles	80,000 cycles
行程 Travel	0.20±0.1mm	

RECOMMENDED P.C.B. LAYOUT

安装尺寸图

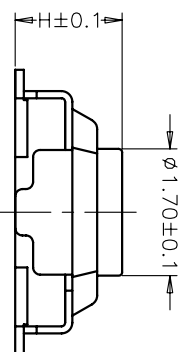

PRODUCT NO.: 1TS004A***-***-***-CT


轻触开关

3X3系列

外形:

→

1

F	盖板	1	不锈钢	镀银			
E	按钮	1	LCP	黑色			
D	防尘膜	1	0.05	/			
C	弹片	2	进口不锈钢覆银	镀银			
B	底座	1	LCP	黑色			
A	卡件	1	磷铜	镀银			
ITEM	PART NAME	QUANTITY	MATERIAL	FINISH			
X. ± 0.3	X.° ± 3°	UNITS	NAME(INTENDED USE)	HON YUAN HON YUAN PRECISION IND. CO.,LTD. SHENZHEN, CHINA.			
X. ± 0.2	X.° ± 2°	MAT'L	3X3 TACT SWITCH				
.XX ± 0.1	.XX' ± 1'		PART NO.(INTENDED USE)				
.XXX ± 0.05	.XXX' ± 0.5'	FINISH	1TS004A***-****-****0				
			APPD: ZO 12/072017				
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON YUAN PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON YUAN PRECISION IND. CO., LTD.		QTY	CHKD: M.H.Li 12/072017				
			DR:Y.Y.Chen 12/072017		SCALE	SHEET	REV.
					15/1	1/1	A
					1TS004A		
					PRODUCT DRAWING		