



REV	ECN NO.	APPD
A	HC210001	PROJOM

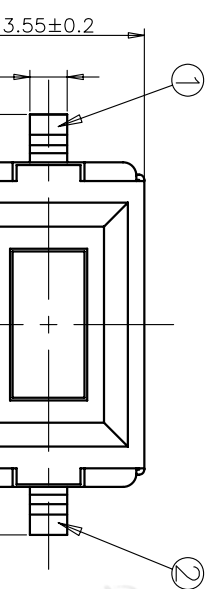


CIRCUIT DIAGRAM

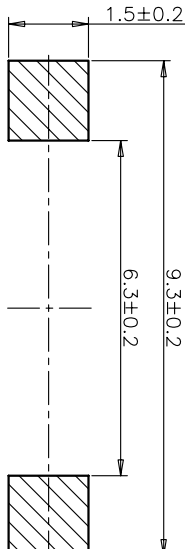

RECOMMENDED P.C.B. LAYOUT

安装尺寸图

额定负荷 Rating	DC 12V/50mA		
接触电阻 Contact Resistance	100mΩ max.		
绝缘电阻 Insulation resistance	DC100V 60S 100MΩ min.		
抗电强度 Dielectric strength	AC250V(50~60Hz) 60S min.		
操作力 Operation force	≤180±30gf	≤300±50gf	
寿命试验 Operating Life	50,000 cycles	30,000 cycles	
行程 Travels	0.25±0.1mm		

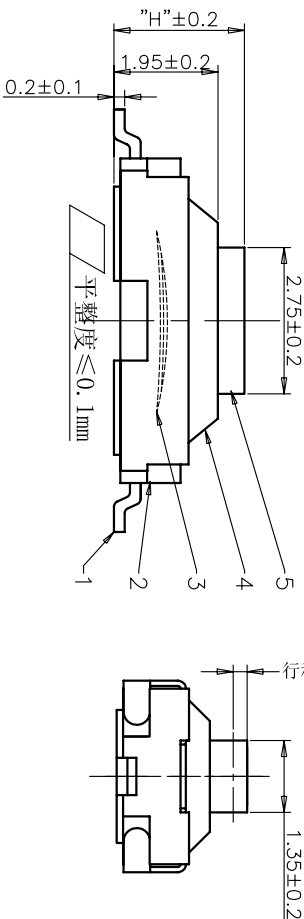

PRODUCT NO. : 1TS002E*****

轻触开关

3X6系列

外形:

A=插脚

B=贴片

C=贴片带柱

D=贴片2.5高

K=贴片带柱8.8

L=贴片10.2

!

!

按钮颜色:
底座颜色:
盖板颜色:
操作力度:
160=160±20gf
180=180±30gf
220=220±30gf
250=250±50gf
300=300±50gf

手感:
0=常规(弹片)
1=大手感(弹片)
2=小手感(弹片)
3=特殊手感(弹片)

有无贴膜: CT=编带(非编带,不启用)
1=贴膜+LCP
2=不贴膜+PA46
3=贴膜+PPA
产品高度(H):
250=2.5mm

5	ACTUATOR	1	PA46	RED
4	COVER	1	STAINLESS STEEL	NATURAL
3	HOUSING	2	STAINLESS STEEL	Ag-PLATED
2	HOUSING	1	PA46	BLACK
1	TERMINAL	1	BRASS	Ag-PLATED
ITEM	PART NAME	QUANTITY	MATERIAL	FINISH
X. ± 0.3	X' ± 3'	UNITS	MM	
.X ± 0.2	.X' ± 2'	MAT'L		
.XX ± 0.1	.XX' ± 1'			
.XXX ± 0.05	.XXX' ± 0.5'	FINISH		
NAME(INTENDED USE)		HON YUAN		
3X6 T/H SERIES		HON YUAN PRECISION IND. CO.,LTD.		
TACT SWITCH		SHENZHEN, CHINA.		
PART NO.(INTENDED USE)		TITLE:		
ITS002E***-****-***2		PRODUCT DRAWING		
APPD: ZO 1/08/2021		DWG NO.: 1TS002E		
CHKD: M.H.Li 1/08/2021		SCALE SHEET REV.		
DR: y.y.Chen 1/08/2021		10/1 1/1 A		