



额定负荷 Rating	DC 12V/50mA
接触电阻 Contact Resistance	500mΩ max.
绝缘电阻 Insulation resistance	DC100V 60S 100MΩ min.
抗电强度 Dielectric strength	AC250V(50~60HZ) 60S min.
操作力 Operation force	<div> $\geq 100 \pm 30 \text{gf}$ $\leq 190 \pm 30 \text{gf}$ </div>
寿命试验 Operating Life	100,000 cycles
行程 Travels	0.13±0.05mm

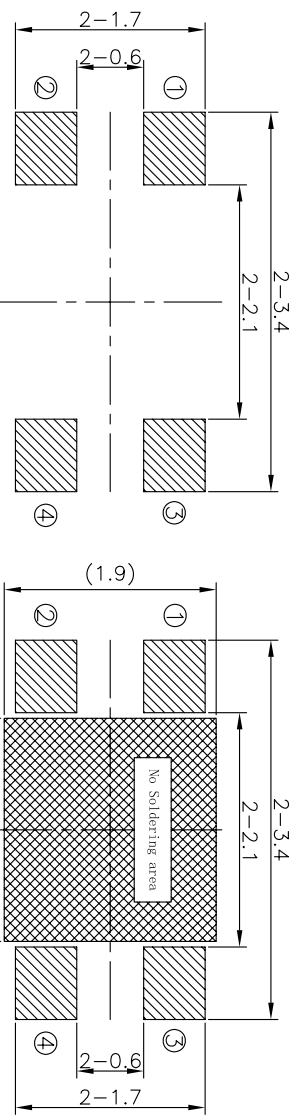

LAND PATTERN PLAN
印刷电路板焊盘参考图

4	FILM	1	POLYAMIDE	WHITE
3	DOME	2	SUS301	Ag-PLATED
2	HOUSING	1	POLYAMIDE	BLACK
1	TERMINAL	1	PHOSPHOR BRONZE	Ag-PLATED
ITEM		PART NAME	QUANTITY	MATERIAL
X. ± 0.2		X. ± 0.2*	UNITS	
X. ± 0.1		X.* ± 0.1*	MM	
.XX ± 0.01		.XX* ± 0.01*	MAT'L	
.XXX ± 0.002		.XXX* ± 0.005*	PART NO.(INTENDED USE)	
		FINISH	TTS028B****-****-****O	
		APPD: Zo 12/06'2019	TITLE: PRODUCT DRAWING	
		CHKD: M.H.LI 12/06'2019	DWG NO.: 1TS028B	
		DR:Y.Y.Chen 12/06'2019	HON YUAN HON YUAN PRECISION IND. CO.,LTD. SHENZHEN, CHINA.	
			HON YUAN HON YUAN PRECISION IND. CO.,LTD. SHENZHEN, CHINA.	
		SCALE 25/1	SHEET 1/2	REV. A

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HON YUAN PRECISION IND. CO., LTD. AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF HON YUAN PRECISION IND. CO., LTD.